




TOOL HOLDER / 刀柄 MAS 403 BT

Weldon Toolholder / BT-侧固式铣刀柄

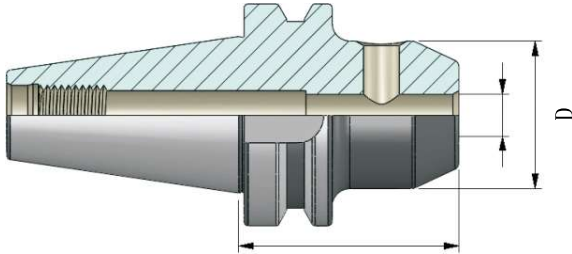

G6.3 12,000min⁻¹

≤ 0.003


DIN 1835-B

BT-侧固式铣刀柄

Order No. 货号	Size 规格	d 夹持直径	D 外径	Cooling 冷却方式	A 有效长度	
31.2006.50	BT30-SL6-50	6	25	AD	50	
31.2008.60	BT30-SL8-60	8	28	AD	60	
31.2010.60	BT30-SL10-60	10	35	AD	60	
31.2012.60	BT30-SL12-60	12	42	AD	60	
31.2014.60	BT30-SL14-60	14	44	AD	60	
31.2016.75	BT30-SL16-75	16	48	AD	75	
31.2018.75	BT30-SL18-75	18	50	AD	75	
31.2020.75	BT30-SL20-75	20	52	AD	75	
31.2020.90	BT30-SL25-90	25	65	AD	90	
41.2006.50	BT40-SL6-50	6	25	AD	50	
41.2006.60	BT40-SL6-60	6	25	AD	60	
41.2008.50	BT40-SL8-50	8	28	AD	50	
41.2010.63	BT40-SL10-63	10	35	AD	63	
41.2012.63	BT40-SL12-63	12	42	AD	63	
41.2014.63	BT40-SL14-63	14	44	AD	63	
41.2016.63	BT40-SL16-63	16	48	AD	63	
41.2016.70	BT40-SL16-70	16	48	AD	70	
41.2018.63	BT40-SL18-63	16	50	AD	63	
41.2020.63	BT40-SL20-63	18	52	AD	63	
41.2020.70	BT40-SL20-70	20	52	AD	70	
41.2025.90	BT40-SL25-90	25	65	AD	90	

MAS 403 BT

Weldon Toolholder/ BT- 侧固式铣刀柄

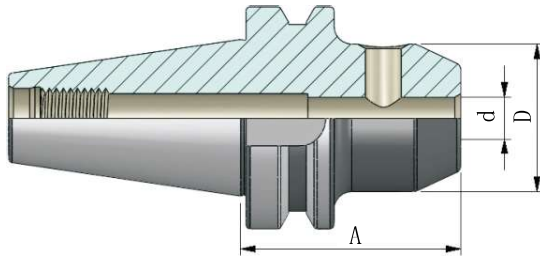

G6.3 12,000min⁻¹

≤ 0.003

DIN 1835 B

BT-侧固式铣刀柄

Order No. 货号	Size 规格	d 夹持直径	D 外径	Cooling 冷却方式	A 有效长度	
41.2025.100	BT40-SL25-100	25	65	AD	100	
41.2032.110	BT40-SL32-110	32	72	AD	110	
41.2040.120	BT40-SL40-120	40	90	AD	120	
41.2040.140	BT40-SL40-140	40	90	AD	140	
51.2006.63	BT50-SL6-63	6	25	AD	63	
51.2008.63	BT50-SL8-63	8	28	AD	63	
51.2010.63	BT50-SL10-63	10	35	AD	63	
51.2012.80	BT50-SL12-80	12	42	AD	80	
51.2016.80	BT50-SL16-80	16	48	AD	80	
51.2020.80	BT50-SL20-80	20	52	AD	80	
51.2025.100	BT50-SL25-100	25	65	AD	100	
51.2025.150	BT50-SL25-150	25	65	AD	150	
51.2032.105	BT50-SL32-105	32	72	AD	105	
51.2040.115	BT50-SL40-115	40	90	AD	115	
51.2050.150	BT50-SL50-150	50	100	AD	150	

应用范围: 适用于夹持DIN1835-B具有侧固平面的刀具
 夹持直径d ≥ 25,由两支螺栓固定刀具
 相关配件: 拉钉

Use: For clamping cutters with cylindrical shank and inclined flat of DIN1835-B
 For d ≥ 25 two clamping screws
 Accessories: rivet

