


Shrink Fit Extension Chuck / 3°热缩刀柄延长杆

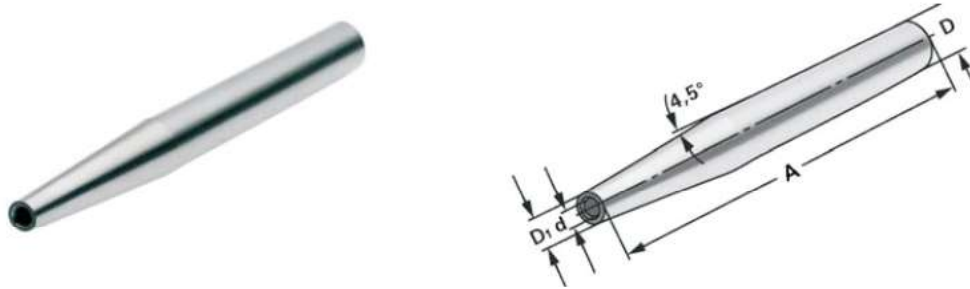


| Order No. 货号 | Size 规格 | d | D1 | D | l1 夹持长度 | l2 锥长 | A |
|-----------------|----------------|----|----|----|------------|----------|-----|
| 4612.8303 | SR12-HSC3-160 | 3 | 6 | 12 | 9 | 28.6 | 160 |
| 4612.8304 | SR12-HSC4-160 | 4 | 7 | | 12 | | |
| 4612.8304 | SR12-HSC5-160 | 5 | 8 | | 15 | | |
| 4612.8306 | SR12-HSC6-160 | 6 | 9 | | 25 | | |
| 4616.8303 | SR16-HSM3-160 | 3 | 6 | 16 | 9 | 105 | 160 |
| 4616.8304 | SR16-HSM4-160 | 4 | 7 | | 12 | | |
| 4616.8305 | SR16-HSM5-160 | 5 | 8 | | 15 | | |
| 4616.8306 | SR16-HSM6-160 | 6 | 9 | | 25 | | |
| 4616.8308 | SR16-HSM8-160 | 8 | 11 | | 32 | | |
| 4616.8310 | SR16-HSM10-160 | 10 | 13 | | | | |
| 4620.8306 | SR20-HSM6-160 | 6 | 9 | 20 | 25 | 105 | 160 |
| 4620.8308 | SR20-HSM8-160 | 8 | 11 | | 32 | | |
| 4620.8310 | SR20-HSM10-160 | 10 | 13 | | | | |
| 4620.8312 | SR20-HSM12-160 | 12 | 15 | | | | |

应用范围: 装夹迅速, 夹紧力大, 高速切削。
适用于夹持高速钢HSS和硬质合金圆柱柄刀具。
直径为Ø3, Ø4和Ø5的被夹持刀具的柄部公差要求达到h4, 直径为Ø6~Ø32的被夹持柄部公差要求达到h6

Use: For mounting straight-shank tools
Note: Toolholders suitable for induction-, contact-and hot air shrink units.
Ø3,4,5 with h4-tolerance and Ø6-Ø32 with h6-tolerance

Shrink Fit Extension Chuck / 3°热缩刀柄延长杆

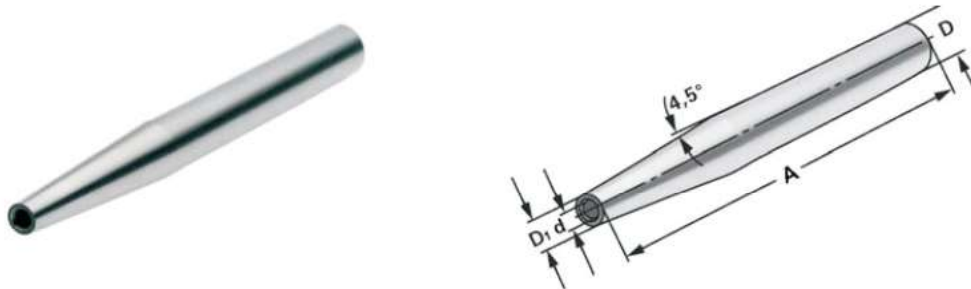

| Order No. 货号 | Size 规格 | d | D1 | D | l1 夹持长度 | l2 锥长 | A |
|-----------------|----------------|----|----|----|------------|----------|-----|
| 4625.8408 | SR25-HSC8-300 | 8 | 14 | 25 | 25 | 124 | 300 |
| 4625.8410 | SR25-HSC10-300 | 10 | 16 | | 32 | | |
| 4625.8412 | SR25-HSC12-300 | 12 | 18 | | 38 | | |
| 4625.8414 | SR25-HSC14-300 | 14 | 20 | | 40 | | |
| 4625.8416 | SR25-HSC16-300 | 16 | 22 | | 40 | | |
| 4632.8410 | SR25-HSC10-300 | 10 | 16 | 32 | 32 | 190.8 | |
| 4632.8412 | SR32-HSC12-300 | 12 | 18 | | 38 | | |
| 4632.8414 | SR32-HSC14-300 | 14 | 20 | | 40 | | |
| 4632.8416 | SR32-HSC16-300 | 16 | 22 | | 40 | | |
| 4632.8420 | SR32-HSC20-300 | 20 | 26 | | 42 | | |

应用范围: 装夹迅速, 夹紧力大, 高速切削。
适用于夹持高速钢HSS和硬质合金圆柱柄刀具。
直径为Ø3, Ø4和Ø5的被夹持刀具的柄部公差要求达到h4, 直径为Ø6~Ø32的被夹持柄部公差要求达到h6

Use: For mounting straight-shank tools
Note: Toolholders suitable for induction-, contact- and hot air shrink units.
Ø3, 4, 5 with h4-tolerance and Ø6-Ø32 with h6-tolerance