




# TOOL HOLDER / 刀柄 DIN 69893-1 (HSK-A)

## HSK-A Sell Mill Toolholder / HSK-A 面铣刀柄

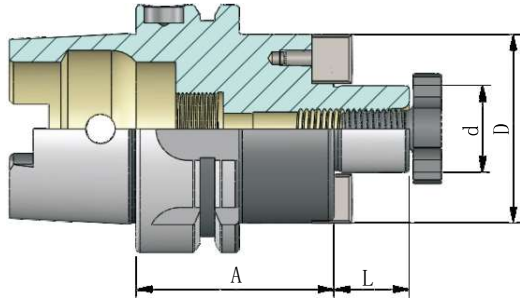

G6.3 15,000min<sup>-1</sup>


≤ 0.004

HSK-A-面铣刀柄

DIN 69893 (HSK)

Order No. 货号	Size 规格	d 心轴直径	D 端面直径	L 心轴长度	A 有效长度	
44.4116.50	HSK-A40-FMA16-50	16	38	17	50	
44.4122.60	HSK-A40-FMA22-60	22	47	19	60	
44.4127.60	HSK-A40-FMA27-60	27	58	21	60	
54.4116.50	HSK-A50-FMA16-50	16	38	17	50	
54.4122.60	HSK-A50-FMA22-60	22	47	19	60	
54.4127.60	HSK-A50-FMA27-60	27	58	21	60	
54.4132.60	HSK-A50-FMA32-60	32	66	24	60	
64.4116.50	HSK-A63-FMA16-50	16	38	17	50	
64.4116.100	HSK-A63-FMA16-100	16	38	17	100	
64.4122.50	HSK-A63-FMA22-50	22	47	19	50	
64.4122.100	HSK-A63-FMA22-100	22	47	19	100	
64.4127.60	HSK-A63-FMA27-60	27	58	21	60	
64.4127.100	HSK-A63-FMA27-100	27	58	21	100	
64.4132.60	HSK-A63-FMA32-60	32	66	24	60	
64.4132.100	HSK-A63-FMA32-100	32	66	24	100	
64.4140.60	HSK-A63-FMA40-60	40	82	27	60	
64.4140.100	HSK-A63-FMA40-100	40	82	27	100	

HSK-A Sell Mill Toolholder / HSK-A 面铣刀柄

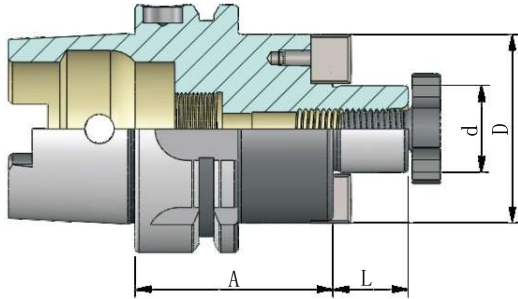

G6.3 15,000min<sup>-1</sup>

≤ 0.004

HSK-A-面铣刀柄

Order No. 货号	Size 规格	d 心轴直径	D 端面直径	L 心轴长度	A 有效长度
104.4122.50	HSK-A100-FMA22-50	22	47	19	50
104.4127.50	HSK-A100-FMA27-50	27	58	21	50
104.4132.50	HSK-A100-FMA32-50	32	66	24	50
104.4140.60	HSK-A100-FMA40-60	40	82	27	60
104.4150.70	HSK-A100-FMA50-70	50	95	40	70

DIN 69893 (HSK)

应用范围: 用于夹持带径向驱动槽的铣刀, 如面铣刀  
 交货内容: 压紧螺栓 (经动平衡处理)  
 相关配件: 压紧螺栓、扳手、冷却导管

Use: For holding like shell mill cutters  
 Delivery range: Locknut (balanced)  
 Accessories: stretching screw, wrench, coolant tubes

