

外径数显千分尺


Outside Digital Micrometer



分辨率:0.001mm
Resolution:0.001mm



| 货号 Code NO. | 测量范围 Measuring Range mm | 精度 Accuracy mm | L mm | a mm | b mm | c mm | d mm |
|----------------|-------------------------------|----------------------|---------|---------|---------|---------|---------|
| 211-101F | 0-25 | 0.002 | 31 | 25 | 7 | 40 | 68 |
| 211-102F | 25-50 | 0.002 | 56 | 35 | 7 | 40 | 68 |
| 211-103F | 50-75 | 0.003 | 81 | 45 | 7 | 40 | 68 |
| 211-104F | 75-100 | 0.003 | 106 | 55 | 7 | 40 | 68 |
| 211-105D | 100-125 | 0.003 | 131 | 67 | 10 | 40 | 68 |
| 211-106D | 125-150 | 0.003 | 156 | 79 | 10 | 40 | 68 |
| 211-107D | 150-175 | 0.004 | 181 | 91.5 | 10 | 40 | 68 |
| 211-108D | 175-200 | 0.004 | 206 | 104 | 10 | 40 | 68 |
| 211-109D | 200-225 | 0.004 | 231 | 121 | 10 | 40 | 68 |
| 211-110D | 225-250 | 0.004 | 256 | 132 | 10 | 40 | 68 |
| 211-111D | 250-275 | 0.005 | 281 | 143 | 10 | 40 | 68 |
| 211-112D | 275-300 | 0.005 | 306 | 157.5 | 10 | 40 | 68 |

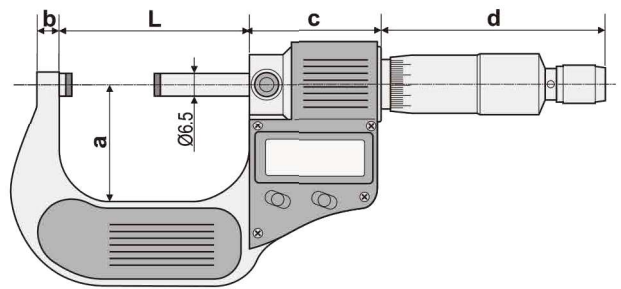

G




211-561

分辨率:0.001mm
Resolution:0.001mm



211-571

| 货号 Code NO. | 测量范围 Measuring Range mm | 精度 Accuracy mm | L mm | a mm | b mm | c mm |
|----------------|-------------------------------|----------------------|---------|---------|---------|---------|
| 211-561 | 0-25 | 0.002 | 31 | 24 | 6.5 | 110 |
| 211-571 | 0-25 | 0.002 | 31 | 24 | 6.5 | 110 |
| 211-572 | 25-50 | 0.002 | 56 | 32 | 6.5 | 110 |
| 211-573 | 50-75 | 0.003 | 81 | 45 | 6.5 | 110 |
| 211-574 | 75-100 | 0.003 | 106 | 57 | 6.5 | 110 |

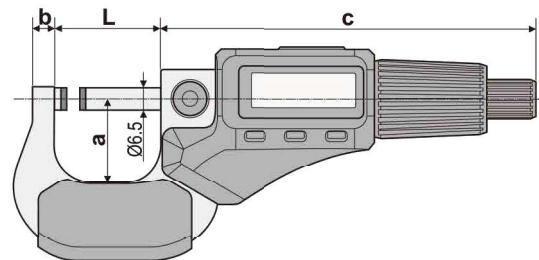

主要特点:

- 绝对、相对测量模式转换
- 数据置零、数据保持、数据预置功能
- 内置式限力装置，确保精确的重复读数
- 硬质合金量面，保证设备持久的稳定性

FEATURES

- Relative and absolute measure conversion
- Zero-setting, data-hold, data preset functions
- Built-in force limiting device ensures accurate repeat reading
- Cemented carbide measuring surface ensures the constant stabilization of the equipment